# This Page Is Inserted by IFW Operations and is not a part of the Official Record

# **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

# IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.

THIS PAGE BLANK (USPTO)



# WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:

C07F 9/38

A1

(11) International Publication Number: WO 96/38455

(43) International Publication Date: 5 December 1996 (05.12.96)

US

(21) International Application Number: PCT/US96/05281

(22) International Filing Date: 17 April 1996 (17.04.96)

30 May 1995 (30.05.95)

(71) Applicant: HAMPSHIRE CHEMICAL CORPORATION [US/US]; 55 Hayden Avenue, Lexington, MA 02173 (US).

(72) Inventors: CULLEN, Barry, A.; Route 1, Box 384, Lyndeboro, NH 03082 (US). PARKER, Brian, A.; 82 Cadogan Way, Nashua, NH 03062 (US).

(74) Agents: LEMACK, Kevin, S. et al.; Nields & Lemack, Suite 8, 176 E. Main Street, Westboro, MA 01581 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

**Published** 

With international search report.

(54) Title: FACILE SYNTHESIS OF PHOSPHONOMETHYLGLYCINE FROM PHOSPHONOMETHYLIMINODIACETIC ACID

#### (57) Abstract

(30) Priority Data:

08/453.003

A process for the preparation of phosphonomethylglycine in nearly quantitative yields which eliminates the use of a noble metal co-catalyst and its concomitant problems. The oxygen-containing gas is replaced with the much more chemically active hydrogen peroxide, which in combination with activated carbon, oxidizes the PMIDA to PMG in very high yield. The amount of oxidant allowed to react with PMIDA is a function of the concentration of oxygen in the gaseous reaction products, and is controlled by monitoring that concentration. In another embodiment, the oxidizing agent is an oxygen-containing gas. In either case, the concentration of oxygen in the gaseous reaction product is monitored to determine the end point of the reaction.

# FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE.	Niger
BB	Barbados	GR	Greece	· NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	
BR	Brazil	KE	Kenya	RO	Portugal
BY	Belarus	KG	•		Romania
CA	Canada	KP	Kyrgystan	RU	Russian Federation
CF		Kr	Democratic People's Republic	SD	Sudan
CG	Central African Republic		of Korea	SE	Sweden
	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

# FACILE SYNTHESIS OF PHOSPHONOMETHYLGLYCINE FROM PHOSPHONOMETHYLIMINODIACETIC ACID

#### BACKGROUND OF THE INVENTION

The present invention relates to N-phosphonomethyliminodiacetic acid ("PMIDA") of the formula (I):

HO O 
$$\begin{tabular}{l} \begin{tabular}{l} \begi$$

and to N-phosphonomethylglycine. Compound I is an important intermediate in the formation of N-phosphonomethylglycine ("glyphosate"), which is a translocated, postemergence, broad spectrum herbicide.

Glyphosate has heretofore been prepared by a variety of oxidations of PMIDA. For example, U.S. Patent No. 3,954,848 discloses the production of glyphosate by the acid catalyzed oxidation-hydrolysis of PMIDA. Specifically, PMIDA is mixed with water and an acid and is heated to an elevated temperature. An oxidizing agent such as hydrogen peroxide is then added to convert the PMIDA to glyphosate, which is then isolated by precipitation. U.S. Patent No. 3,969,398 discloses oxidation of PMIDA to glyphosate employing a molecular oxygencontaining gas such as air, oxygen, oxygen diluted with helium, argon nitrogen or other inert gases, oxygen-hydrocarbon mixtures, etc., and employing activated carbon as the catalyst. U.S. Patent No. 4,147,719 discloses the production of certain mono- and di-salts of glyphosate in a single aqueous reaction system by oxidizing a salt of PMIDA with a molecular oxygencontaining gas in the presence of platinum supported on an

activated carbon substrate. The oxidation reaction is conducted at super-atmospheric pressures in the range of 1.5 to 5 kg/cm<sup>2</sup> or higher. U.S. Patent No. 4,898,972 discloses the production of glyphosate by the oxidation of PMIDA using a salt of cobalt or manganese in the presence of bromide ions. U.S. Patent No. 4,002,672 discloses the production of glyphosate and salts thereof by the acid catalyzed hydrolysis of PMIDA. PMIDA is contacted with a strong acid having a pKa of less than 2.2, at an elevated temperature so as to cause the decomposition or hydrolysis of the phosphonomethyl iminodiacetic acid into Nphosphonomethyl-glycine and other decomposition products. U.S. Patent No. 3,954,898 discloses how a large variety of oxidizing agents, including hydrogen peroxide, can be used to oxidize PMIDA to glyphosate in the presence of acetic or stronger acid, at 70-100°C. U.S. Patent No. 4,696,772 discloses how the activity of the activated carbon catalyst can be enhanced by first removing oxides of carbon from the surface of the carbon.

As can be seen from the foregoing, phosphonomethylglycine can be made by oxidizing phosphonomethyliminodiacetic acid by a myriad of techniques. However, all but a few of these produce an effluent that contains formaldehyde and toxic metals and/or strong acids. The use of very strong acid solutions at elevated temperatures necessitates the use of corrosion resistance equipment. Moreover, some of these processes must be run under very dilute conditions, requiring large amounts of energy to concentrate the solutions to allow the glyphosate product to be recovered in an economically attractive yield.

Phosphonomethylglycine also may be prepared by oxidizing

PMIDA with an oxygen-containing gas in the presence of a noble metal co-catalyst for oxidizing by-product formaldehyde or formic acid. Oxidation of PMIDA in the presence of the noble metal but in the absence of activated carbon does not produce any product, see U.S. Patent No. 3,950,402. The drawback to the noble metal catalysts is that they are very expensive and must be protected from rapid amine deactivation by either coating them with a polymer as disclosed in U.S. Patent No. 4,579,689, or encapsulating them in a microcrystalline inorganic matrix, as disclosed in U.S. Patent No. 4,582,650.

In accordance with U.S. Patent No. 4,147,719, PMG salts may be prepared directly from a salt of PMIDA using an oxygen-containing gas in the presence of a noble metal oxidation catalyst, namely, platinum, supported on an activated carbon substrate. Again, though conversions are high, so is the cost of the catalyst. Thus, extreme care must be taken not to lose any catalyst during work-up of the product. The use of the noble metal catalyst is said to provide concurrent oxidation of the formaldehyde co-product as it is formed, which significantly reduces the time and expense otherwise required to remove this co-product from the final reaction product. The '719 patent teaches that activated carbon catalysts alone do not provide for this concurrent oxidation of formaldehyde, and in fact cause increased production of undesirable by-products.

It is therefore an object of the present invention to provide a process for preparing phosphonomethylglycine that eliminates the drawbacks of the prior art processes.

It is a more specific object of the present invention to

provide a process for preparing phosphonomethylglycine that eliminates the deleterious effluent and minimizes the cost of the catalyst.

#### SUMMARY OF THE INVENTION

The problems of the prior art have been overcome by the present invention, which provides a process for the preparation of phosphonomethylglycine in nearly quantitative yields, while simultaneously oxidizing the toxic by-product formaldehyde to formic acid and CO<sub>2</sub> or salts thereof. In general terms, the process of the present invention eliminates the use of the noble metal co-catalyst and its concomitant problems. The oxygencontaining gas is replaced with the much more chemically active hydrogen peroxide, which in combination with activated carbon, oxidizes the PMIDA to PMG in very high yield, and oxidizes formaldehyde by-product to formate and CO<sub>2</sub>, leaving a no-longer toxic effluent that can be readily biodegraded. The rate of oxidant addition is carefully controlled and monitored.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a graph of a typical oxidation of PMIDA with hydrogen peroxide and activated carbon; and

Figure 2 is a graph of an oxidation of PMIDA in accordance with Example 5.

#### DETAILED DESCRIPTION OF THE INVENTION

The starting material, PMIDA, can be prepared by conventional methods well known to those skilled in the art,

such as by the reaction of formaldehyde, iminodiacetic acid and orthophosphorous acid in the presence of a strong acid such as hydrochloric or sulfuric acid. The resulting N-phosphonomethyl-iminodiacetic acid mixture can be used directly in the instant process, or the N-phosphonomethyl-iminodiacetic acid can be isolated from the reaction mixture prior to use as a starting material in the instant process.

The oxidizing agent in accordance with the present invention can be an inorganic peroxide, preferably hydrogen peroxide, or a oxygen-containing gas, such as air, pure oxygen, ozone, etc. In one embodiment of the invention, the oxygencontaining gas is used to oxidize most of the PMIDA, and then peroxide is used to complete the reaction. More specifically, since oxygen-containing gases suitable for use in the present invention are generally less expensive than peroxide, about 60-90% of the oxidation of PMIDA, preferably about 70-80% of the oxidation of PMIDA, can be carried out using the oxygencontaining gas. Thereafter, peroxide can be used to complete the oxidation of the PMIDA and to oxidize formaldehyde generated. Adding peroxide after about 90% of the PMIDA has been oxidized by the oxygen-containing gas is not desirable, since the presence of unreacted PMIDA seems to protect against the oxidation of PMG by the peroxide. The exact point at which peroxide is used will therefore depend upon a balance between the cost savings achieved by using the oxygen-containing gas and the tolerable amount of deleterious oxidation of PMG by the peroxide. Preferably the amount of oxidizing agent used is regulated so as to maintain the concentration of oxygen in the

vent gases at less than about 10%, more preferably less than about 3%.

The activated carbon catalysts employed in the instant invention are commercially available, and include Norit SX+ and RO 0.8, Darco KB, Calgon RB, RD, CAL, CPG and BL, for example. Either granular or powdered activated carbon is suitable. The activated carbon should have a specific surface area of from 100 to 2000 m²/g, preferably about 400 to about 1600 m²/g. The amount of activated carbon used can range from about 0.1 unit/PMIDA to greater than about 10 unites/PMIDA, as would occur in a packed continuous reactor. For a batch reaction, the preferred ratio of carbon to PMIDA ranges from about 0.2 to about 0.4.

Surprisingly, the inventors of the present invention have found that if the feed rate of H<sub>2</sub>O<sub>2</sub> to the reaction mix is continuously regulated so as to maintain the %0, in the vent gases at a low level, such as less than about 10%, preferably less than about 3%, then the decomposition of the  $H_2O_2$  by the activated carbon, to O2 and H2O, becomes merely an insignificant side reaction, although those skilled in the art know that the oxygen in the vent gas could be controlled at a higher concentration (such as 50% or 20%) with a corresponding increase in material costs. Controlling the oxidation by continuously measuring the concentration  $O_2$  in the vent gases allows the efficiency of the reaction to be maximized. Surprisingly, the inventors have also discovered that not only is the rate of oxidation of co-product CH2O faster than the oxidation of PMIDA at all conditions studied,

concentration of O<sub>2</sub> rapidly increases by much greater than 5% at the time when all of the PMIDA has been consumed. This has been confirmed by HPLC analysis, and allows the reaction to be stopped when the conversion of PMIDA to PMG is at a maximum and the undesirable oxidation of PMG is at a minimum. For example, the reaction can be stopped when the oxygen concentration increases at a rate exceeding about 20% per hour.

Preferably the oxidation is carried out at a temperature of from about 30°C to about just below the boil, most preferably at from about 50°C to about 65°C. At higher temperatures, formic acid by-product tends to react with glyphosate product, yielding water soluble N-formyl-glyphosate (HCO-PMG), which in turn can be oxidized to N-formyl-aminomethylphosphonic acid. By operating at lower temperatures, the rate of HCO-PMG formation is reduced faster than the rate of oxidation. The reaction temperature and the concentration of activated carbon should be chosen so as to provide a short reaction time and minimize the formation of HCO-PMG.

The concentration of the phosphonomethyliminodiacetic acid should be from about 1% to about 60% or higher in water. Preferably the concentration is about 35% to about 55%.

Salts of PMG can be prepared by using the appropriate salt of N-phosphonomethyliminodiacetic acid as the starting material. Suitable salt forming cations include alkali metals, alkaline earth metals, trimethylsulfonium, guanidinium, urea, ammonium and organic ammonium (provided that when the organic group is aryl, the ammonium salt is a primary amine salt) including those prepared from organic amines such as alkyl amines, alkylene

amines and alkanol amines containing not more than 2 amine such as methylamine, ethylamine, n-propylamine, isopropylamine, n-butylamine, isobutylamine, sec-butylamine, namylamine, isoamylamine, hexylamine, heptylamine, octylamine, decylamine, undecylamine, dodecylamine, nonylamine, tridecylamine, tetradecylamine, pentadecylamine, hexadeclyamine, heptadecylamine, octadecylamine, methylethylamine, methylisopropylamine, methylhexylamine, methylnonylamine, methylpentadecylamine, methyloctadecylamine, ethylbutylamine, ethylheptylamine, ethyloctylamine, hexylheptylamine, hexyloctaylamine, dimethylamine, diethylamine, di-n-propylamine, diisopropylamine, di-n-amylamine, diisoanylamine, dihexylamine, di-heptylamine, dioctylamine, trimethylamine, triethylamine, tri-n-propylamine, triisopropylamine, tri-n-amylamine, ethanolamine, n-propanolamine, isopropanolamine, diethanolamine, N, N-diethylethanolamine, N-ethylpropanolamine, Nbutylethanolamine, allylamine, n-butenyl-2-amine, n-pentenyl-2-2,3-dimethylbutenyl-2-amine, di-butenyl-2-amine, nhexenyl-2-amine and propylenediamine; primary aryl amines such as aniline, methoxyaniline, ethoxyaniline, o,m,p-toluidine, phenylenediamine, 2,4,6-tribromoanaline, benzidine, napthylamine, o,m,p-chloroaniline, and the like; and heterocyclic amines such as pyridine, morpholine, piperidine, pyrrolidine, indoline, azepine and the like.

The instant invention will be better understood by reference to the following specific but non-limiting examples. It is understood that said invention is not limited by these procedures which are offered merely as illustrations;

modifications can be made without departing from the spirit and scope of the invention.

#### EXAMPLE 1

A slurry of PMIDA acid (0.375 M) was reacted with 0.56 M of 28% ammonia to give a 25% slurry of PMIDA acid equivalent, as an equimolar mixture of the mono- and di-ammonium salts. this was added 40 grams of activated carbon (Calgon type RB pulverized) and the slurry was rapidly stirred. solution of  $H_2O_2$  was then pumped into the slurry at a rate of 0.575 g./min. until a total of about 2.3 M has been added. temperature was maintained between 25° and 30°C during the reaction by immersing the reaction flask in an unheated or cooled water bath during the addition. Periodically, samples were withdrawn, filtered to remove solids and analyzed by HPLC. Surprisingly, no formaldehyde or any other impurities normally found when oxygen is used in place of H,O, were found, especially towards the end of the addition where little PMIDA remains to be oxidized. Only PMG, a small amount of formic acid and a trace of N-formyl-PMG were found.

#### EXAMPLE 2

The reaction of Example 1 was repeated, except that the mono-isopropylamine salt of PMIDA was used as the starting reactant, and 25%  $\rm H_2O_2$  was used. Essentially the same results were obtained.

#### EXAMPLE 3

The reaction of Example 1 was repeated, except that the

tri-sodium salt of PMIDA was used as the starting reactant, and 50%  $\rm H_2O_2$  was used. The tri-sodium salt did not oxidize as readily as the lower salts.

#### EXAMPLE 4

A 500 ml. Parr pressure bottle was charged with water plus PMIDA (0.375 M) plus, when required, a quantity of base, and activated carbon (granular or powder). The contents were stirred with a magnetic stirrer and heated to and maintained at the desired reaction temperature with an electric heating tape. When required, the bottle was pressurized and maintained at the desired pressure with a back-pressure control valve; otherwise the bottle was vented to atmosphere. The vent gases from the reactor were continuously monitored for % O<sub>2</sub> and the reaction conditions recorded every minute. Table 1 lists the operating conditions for each of the 42 experiments.

Typically the %  $O_2$  in the vent gases was below 10% for the lower reaction temperatures, and when the reaction temperature was raised to  $\geq 60\,^{\circ}\text{C}$ , the vent gas contained essentially no free  $O_2$ . When approximately 2 equivalents of  $H_2O_2$  had been added, the %  $O_2$  increased rapidly, indicating the reaction to PMG to be complete. This was confirmed by HPLC analysis of the samples. Table 2 lists the results of the 42 experiments. Figure 1 shows a graph of a typical oxidation.

ب			_			_			_	_																									_						_	_
-M H2O2/min./M PMIDA	0.0110	0.0098		0.0215	0.0150	0.0130	0.0130	0.0168	0.0175	0.0171	0.0171	0.0139	0.0163	0.0171	0.0163	0.0131	0.0118	0.0093	0.0087	0.0092	0.0092	0.0085	0.0093	0.0093	0.0044	0.0040	0.0081	0.0107	0.0118	0.0055	0.0109	0.0091	0.0094	0.0094	0.0111	0.0970	0.1150	0.0103	0.0091	0.0115	0.0107	0.0115
% H2O2	10.2	25.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	. 50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0
M H2O2/M PMIDA	1.58	2.49	2.00	2.62	2.40	2.02	-2.4	1.04	2.00	2.00	2.09	2.31	2.04	2.04	2.04	2.09	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04	2.04
Press., psig					37.5	37.5	37.5	37.5	37.5	37.5																				37.5												
Temp., °C		-30	-30	-30	40	40	40	09	09	6.0	60	45	7.5	09	09	09	09	75	7.5	75	09	09	09	7.5	45	60	60	09	06	60	60	60	60	09	09	09	09	09	09	09	09	09
Base Туре	2013	I-Pr-amine			SIN.	NOI	NOI	CI III	I-Pr-amine													I-Pr-amine	I.Pr.amine	I.Pr-amine	i-Pr-amine	l-Pr-amine	l-Pr-amine	i-Pr-amine	i-Pr-amine		l-Pr-amino	I-Pr-amine		I-Pr-amine		i-Pr-amine	I-Pr-amine	I-Pr-amine	I-Pr-amine	1-Pr-amine	I-Pr-amine	i-Pr-amine
M base/ M PMIDA		1.00			1.00																	1.00			1.00						1.00			1.00							1.00	
C Carbon Type	Calgon RB Pulv.	Calgon NB Pulv.	Calgon RB Pulv.	Calgon ND Putv.	Calgon RB Pulv.	Calgon RB Pulv.	Calgon NB Pulv.	Calgon NB Pulv.	Calgon RB Pulv.	Calgon NB Pulv.	Calgon RB Putv.	Calgon NB Pulv.	Calgon NB Pulv.	Calgon RB Pulv.	Calgon NB Pulv.	Calgon RB Pulv.	Noril A Supra	Norit A Supra	Calgon RB Pulv.	Noril SX Plus	Calgon FIB Pulv.	Calgon RB Pulv.	Calgon RB Pulv.	Calgon RB Pulv.	Calgon RD Putv.	Calgon MB Pulv.	Calgon RB Pulv.	Calgon RB Pulv.	Calgon RB Pulv.	Calgon RB Pulv.	Calgon III3 Pulv.	Salgon CPG12x40	Salgon CPG12x40	Calgon fill Pulv.	Calgon RB Pulv.	algon CPG12x40	Calgon RB Pulv.	Calgon RB Pulv.	Salgon CPG12x40	Calgon RD Pulv.	Calgon RB Putv.	Calgon NB Pulv.
g PMIDA/g C							2.13												]	l	Ì							1							i	١.			١.		2.13	
% PMIDA		25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	43.6	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
EXPERIMENT	-	2	3	4	5	9	/	8	6	10	-	12	13	14	15	91	17	9.	19	20	21	22	23	24	25	26	27	2.8	29	30	31	32	33	34	35	36	37	38	38	40	41	42

51	<u> </u>	T	_	1	ī	-		<sub>1</sub>	_			-		_	1	_	_	_	_	_		ī	Т	T	ī	T		1		Т	1	Ī	1		-	ī		_			<u> </u>	1		1
% In hand yield										07.0	7.00	90.2	7.70	9.00	94.0	03.7	0.00	57.9	64.5	64.3	9.00				0 00	60.00	0.00	78.8	20.8	57.4	61.7	77.6	9.92	5.0	31.6	0.00	42.5	0.88	6.90	0.0	88.7	0.60	84.7	
%conv to PMG										97.9	98.5	98.2		98.0	00.2	93.6	91.7	99.2			89.5	8.7 A	7 7.0	07.9	5,70	81.6	82.7	80.3	76.2	70.2	95.7	90.4	82.6	97.8	81.4		92.6		94.0	06.1				
2	0.20	0.27		0.04	90.0	0.23	0.16	0.33	0.78	0.14	0.14	0.10		90.0	90.0	0.38	0.28				4 30	200	200	0.92		0.43		0.95	3.50	2.54	0.32	0.03	1.04	0.50	0.70	0.75	0.29	101	0.80	0.62	- 13	90	69	1.04
% HCO2H	1.90	2.34		3.35	3.81	3.63	3.43	271	9.7.6	000	20.5	3.52		3 94	3.74	3.10	1 04				200	00.7	2.00	3.1	- 54	2.93	3.49	3.30	4.00	3.29	0.68	3.20	3.00	3 90	4 00	3.50	906	2 5	25.0	196	37.0	2,40	2	3.61
% I ICO-AMPA		0.10			0.02	0.75	000	200		60:0						0.51	200	20.				0.29	0.5/	0.57	1.15	0.32	1.82	0.98	2.57	1 78	0.05	0.55	1.00							200	/0.0	07.0	90.0	1.03
% I ICO-MeAMPA																							0.32	0.34	0.31	0.36		98.0	0 40	96.0	20.7	91.0	01.0	26.0	20.0	0.0	20.0	0.02	0.34	0.23		0.24	0.46	0.44
% PMIDA	2.67			E0 24	7.0			=3.6	2.0=			1					0.40	0.20				0.40	0.19	19.0	0.57	2.44	1 33	70.0	9	2					00.0	0.09								
% PMG	9.6	10.5	2	12	9,	0.01		13.2	16.7	16.0	=	=	=		6.0		1.0	1.3				1.4	7.6	7.7	7.4	12.6	-				2 2	2 3	2 3	١	6.0	6	12.5	0.3	13.5	13.4	-17	13.0	14.2	13.1
%WePMG				110	0.5.					=0.2	0.33	0.20	0.34		0.40	0.36																									0.30			
% IDA					90	0.08		Irace	Irace	Iraco							trace																								0.04			
% AMPA				9, 6	0.10	2.0				0.28							0.14	0.16							0 93	0.65										0.88	0.39	0.79	0.87		0.45	1.07	0.06	0.56
% MADAMADA	V 1000																	0.12										0.47	60.0	0.34	0.47	0.05			0.32	0.68		0.55		0.85	0.26			
EVOCOLUZENTI % MOAMDA   % AMPA	T I I I I	- 6	2	6	4	5	9	7	8	6	10	=	12	13	14	15	16	17	æ	9	20	2	33	236	200	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	3.6	40	14	42

## EXAMPLE 5

A 500 ml Parr pressure bottle equipped with a sintered stainless steel (s.s.) sparge tube for  $O_2$  dispersion, a similar tube for sampling, a magnetic stirrer, a %" s.s. 100  $\Omega$  DIN Pt RTD, a s.s. air condenser topped with a pressure relief valve set at 60 psi, a pressure gauge, a vent valve and an adjustable back-pressure control valve. The bottle was charged with 200g  $H_2O$ , 160g PMIDA and 40g Norit SX+ activated carbon.

The vessel was heated and maintained at 60°C with an electric mantle and the temperature controlled by a Macintosh II running Workbench<sup>TM</sup>. A Microelectrodes, Inc. oxygen probe and meter were used to monitor the concentration of  $O_2$  in the vent gases from the back-pressure control valve. The  $O_2$  probe was maintained at a constant temperature by mounting it in a small jacketed receiver. Oxygen was metered into the reactor through a O-2 1/min Sierra mass flow controller. The outputs from both the  $O_2$  meter and the mass flow controller were fed to the Mac+Workbench<sup>TM</sup>. Flow set point to the mass flow controller came from the Mac+Workbench<sup>TM</sup>. Temperature,  $O_2$  flow rate,  $O_3$ 0 and  $O_4$ 0 were charted on the computer and the data recorded every minute. The results are shown graphically in Figure 2.

When all of the PMIDA became oxidized, 6:40 after the start of the oxygen, the  $O_2$  concentration increased rapidly. By monitoring the  $d^*O_2/dt$ , the rate of change in the  $^*O_2$ , this point in the reaction became readily apparent and could be used, if desired, to automatically shut off the flow of oxygen. In this case, when the rate increased to  $>20^*$   $O_2/hr$ ., an alarm was turned on and the  $O_2$  was turned off manually.

After cooling to room temperature and allowing to stir overnight, a sample of liquor was analyzed by HPLC with the following results:

N-methylaminomethylphosphonic acid	(MeAMPA)	≈0.1%
aminomethylphosphonic acid (AMPA)		≈0.1%
N-methyl-PMG		0 . 4 %
formaldehyde		6%
PMG		2.7%
formic acid		3.2%
N-formyl-PMG		≈0.15%
PMIDA		trace

## EXAMPLE 6

Example 5 was repeated, but the PMIDA was reduced to half to 80g to shorten the reaction time by 50%. The oxygen flow was stopped after 160 minutes, or  $\approx 80\%$  of the amount of  $O_2$  needed to complete the reaction. The liquor was sampled for HPLC analysis. The formaldehyde concentration was 2.1% (but would have been  $\approx 4.2\%$  if the charge of PMIDA had remained at 160g as in Example 5). Unoxidized PMIDA was seen but not quantified.

The pressure was vented to atmospheric and 50%  $H_2O_2$  slowly pumped into the reaction mixture while maintaining the vent gas  $*O_2$  at  $\le 10\%$  by adjusting the  $H_2O_2$  pumping rate. After a 15.5g had been added, no unreacted PMIDA was found in the liquor and the formaldehyde concentration was reduced to 1.2%. More 50%  $H_2O_2$  was added very slowly while maintaining the temperature at 60°C. After a total of 27.3g had been added, the liquor was sampled and analyzed by HPLC. The formaldehyde concentration was reduced to 0.17% and the AMPA had increased from nil to  $\approx 0.6\%$  and the MeAMPA to  $\approx 0.4\%$ .

#### What is claimed is:

1. A process for preparing N-phosphonomethyl glycine or salts thereof which comprises:

- (a) oxidizing N-phosphonomethyl-iminodiacetic acid or a salt thereof in a vessel with an oxidizing agent consisting essentially of hydrogen peroxide in the presence of activated carbon at a temperature effective for producing said N-phosphonomethyl glycine or salts thereof;
  - (b) venting the gaseous reaction products from said vessel;
- (c) monitoring the concentration of oxygen in said gaseous reaction products; and
- (d) regulating the amount of said oxidizing agent allowed to react with said N-phosphonomethyliminodiacetic acid at any given time based upon the monitored concentration of oxygen in said gaseous reaction product.
- 2. The process of claim 1, wherein the amount of said oxidizing agent is regulated so that said concentration of oxygen in said gaseous reaction products does not exceed about 50%.
- 3. The process of claim 1, wherein the amount of said oxidizing agent is regulated so that said concentration of oxygen in said gaseous reaction products does not exceed about 20%.
- 4. The process of claim 1, wherein the amount of said oxidizing agent is regulated so that said concentration of oxygen in said gaseous reaction products does not exceed about 10%.
  - 5. The process of claim 1, wherein said amount of said

oxidizing agent is regulated so that said concentration of oxygen in said gaseous reaction products is less than about 3%.


- 6. The process of claim 1 wherein the reaction is carried out at a temperature of from about 20° to about 150°C.
- 7. The process of claim 1 wherein the reaction is carried out at a temperature of from about 50° to about 65°C.
- 8. The process of claim 1 wherein said activated carbon has a specific surface area of from about 100 to about 2000  $\ensuremath{\text{m}^2/\text{g}}\xspace$  .
- 9. The process of claim 1 wherein said activated carbon has a specific surface area of from about 400 to about 1600  $\rm m^2/\rm g$  .
- 10. The process of claim 1 wherein the initial ratio of activated carbon to phosphonomethyliminodiacetic acid is between about 0.01 to about 10.
- 11. The process of claim 1 wherein the initial ratio of activated carbon to phosphonomethyliminodiacetic acid is between about 0.1 to about 1.
- 12. The process of claim 1 wherein the initial ratio of activated carbon to phosphonomethyliminodiacetic acid is between about 0.2 to about 0.4.
- 13. The process of claim 1, wherein the amount of oxidizing agent allowed to react with said N-phosphonomethyliminodiacetic acid is decreased to zero when said concentration of oxygen in said gaseous reaction products increases by a rate exceeding 20% per hour.
  - 14. A process for preparing N-phosphonomethyl glycine or

salts thereof which comprises:

(a) feeding N-phosphonomethyl-iminodiacetic acid or a salt thereof into a vessel;


- (b) oxidizing said N-phosphonomethyl-iminodiacetic acid with an oxygen-containing gas in the presence of activated carbon at a temperature effective for producing said N-phosphonomethyl glycine or salts thereof;
  - (c) venting the gaseous reaction products from said vessel;
- (d) monitoring the concentration of oxygen in said gaseous reaction products; and
- (e) ceasing feeding said N-phosphonomethyl-iminodiacetic acid or a salt thereof when the monitored concentration of oxygen increases at a rate exceeding 20% per hour.
- 15. A process for preparing N-phosphonomethyl glycine or salts thereof which comprises:
- (a) feeding N-phosphonomethyl-iminodiacetic acid or a salt thereof into a vessel;
- (b) oxidizing 70-80% of said N-phosphonomethyliminodiacetic acid with an oxygen-containing gas in the presence of activated carbon at a temperature effective for producing said N-phosphonomethyl glycine or salts thereof;
  - (c) venting the gaseous reaction products from said vessel;
- (d) monitoring the concentration of oxygen in said gaseous reaction products;
- (e) oxidizing substantially all of the remaining N-phosphonomethyl-iminodiacetic acid or salt thereof with hydrogen peroxide; and
  - (e) ceasing feeding said N-phosphonomethyl-iminodiacetic

acid or a salt thereof when the monitored concentration of oxygen increases at a rate exceeding 20% per hour.

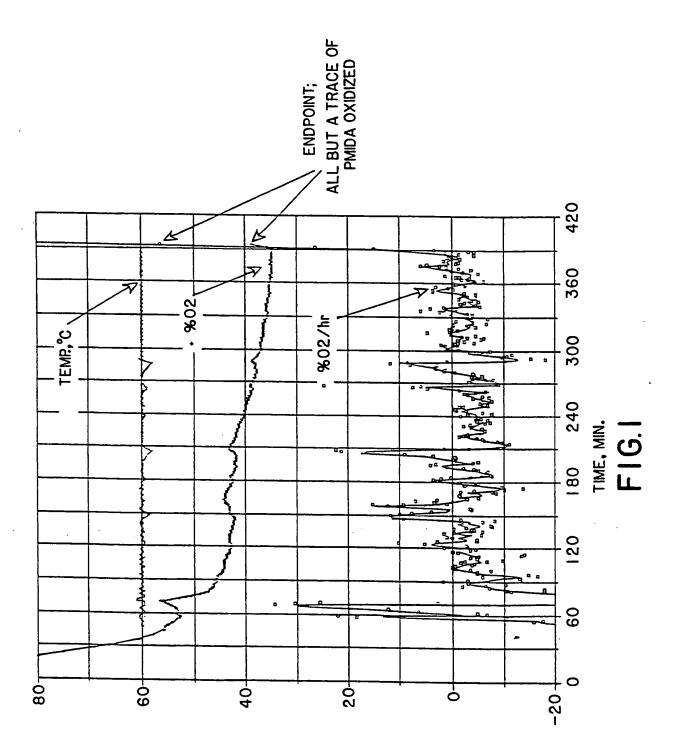

%02, △ %02/hr, TEMP., °C

SUBSTITUTE SHEET (RULE 26)

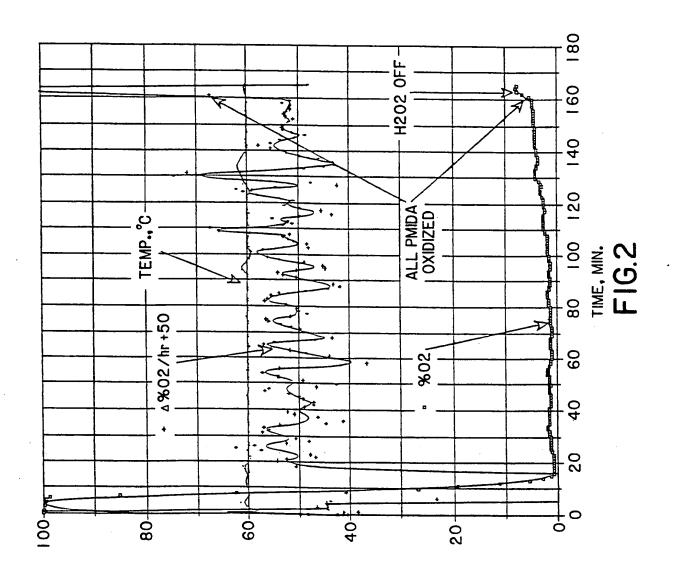

%02, △%02/hr, TEMP.,°C

SUBSTITUTE SHEET (RULE 26)

## INTERNATIONAL SEARCH REPORT

Form PCT/ISA/210 (second sheet)(July 1992)\*

International application No. PCT/US96/05281

1	ASSIFICATION OF SUBJECT MATTER								
IPC(6) US CL	:C07F 9/38 :562/17	·							
	to International Patent Classification (IPC) or to bot	h national classification and IPC							
B. FIE	LDS SEARCHED								
Minimum o	documentation searched (classification system follow	ed by classification symbols)							
U.S. :	562/17								
Documenta	tion searched other than minimum documentation to t	he extent that such documents are included	in the fields searched						
<u> </u>									
ł	data base consulted during the international search (in	name of data base and, where practicable	, search terms used)						
C. DOC	CUMEN'TS CONSIDERED TO BE RELEVANT								
Category*	Citation of document, with indication, where a	ppropriate, of the relevant passages	Relevant to claim No.						
Υ	US, A, 3,969,398 (HERSHMAN) column 6, lines 29-31.	13 July 1976, Abstract,	1-15						
Y	US, A, 3,950,402 (FRANZ) 13 A 59-68.	pril 1976, column 2, lines	1-15						
A	US, A, 3,954,848 (FRANZ) 04 document.	1 May 1976, see entire	1-15						
		·							
ı									
Furth	er documents are listed in the continuation of Box C	See patent family annex.							
	cial categories of cited documents:  ument defining the general state of the art which is not considered	"T" Inter document published after the inter date and not in conflict with the applica principle or theory underlying the inve	tion but cited to understand the						
	oc of particular relevance lier document published on or after the international filing date	"X" document of particular relevance; the							
"L" doc	ument which may throw doubts on priority claim(s) or which is d to establish the publication date of another citation or other	considered novel or cannot be consider when the document is taken alone	ed to involve an inventive step						
	vial reason (us specified)  unent referring to an oral disclosure, use, exhibition or other  une	"Y" document of particular relevance; the considered to involve an inventive combined with one or more other such being obvious to a person skilled in th	step when the document is documents, such combination						
P doc	ument published prior to the international filing date but later than priority date claimed	*&* document member of the same patent	٩						
Date of the a	actual completion of the international search	Date of mailing of the international sea 08 AUG 1996	reh report						
Commission	ailing address of the ISA/US er of Patents and Trademarks	Authorized officer	1/apres 1						
Box PCT Washington,	, D.C. 20231	BARBARA FRAZIER							
Facsimile No	. (703) 305-3230	Telephone No. (703) 308-1235	1/						

TH'S PAGE BLANK (USPTO)

THE PHEE BLANK USTO)